



# Patterns - for Canyon Stone Tumbled Pavers



▼ Canyon Stone 90° Herringbone Pattern

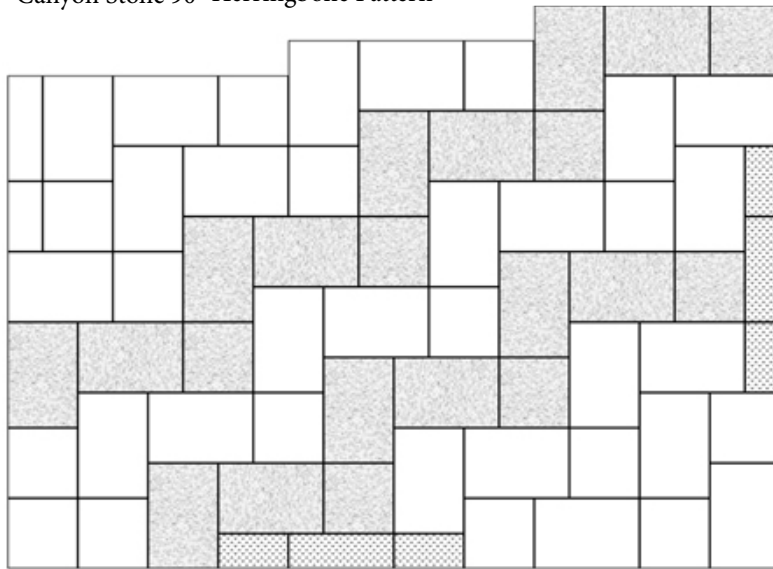

 6 x 6 25%  
SF REQ  
APPOX  
 6 x 9 75%  
SF REQ  
APPROX  
 FIELD CUT  
And 6 x 3

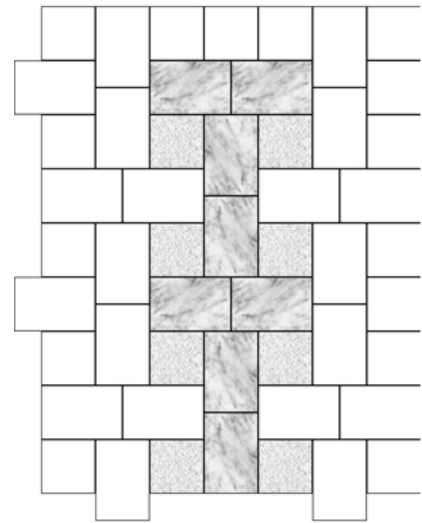
▼ Canyon Tumbled Paver  
6 x 6 and 6 x 9 Canyon Pattern



 25% 6 x 6  
SF REQ  
APPROX  
 75% 6 x 9  
SF REQ  
APPROX

No Cutting Required if Project Size Allows

▼ Canyon Three Size Random Pattern

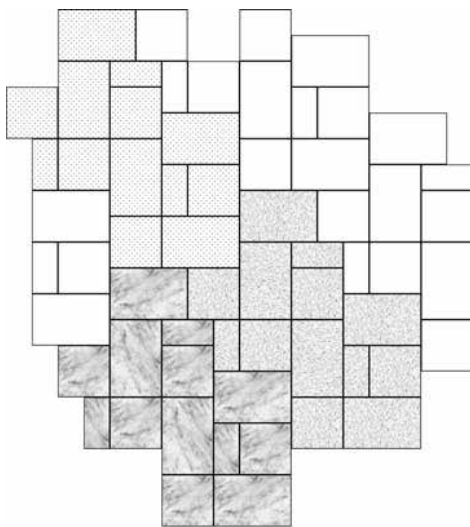


6 x 3 3.5 11% of area  
 6 x 6 6 36% of area  
 6 x 9 9 54% of area

Note: Trim and use edge pieces as needed.


▼ Canyon Tumbled Paver




6" x 6" and 6" x 9" Running Bond  
Use 6" x 3" as needed

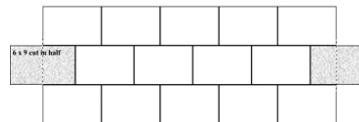

6" x 9" Running Bond

 Field Cutting Required To Finish Edges


▼ Canyon Tumbled Paver  
3–Stone–Random Run

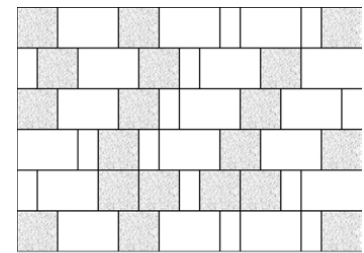

Note: This random pattern is not exact.

Canyon Tumbled Pavers  
Soldier Course Application

6" x 6" and 6" x 9"  
With 6" x 9" Soldier Course

 6" x 3" Piece

